



LINED TEES

EQUAL TEE

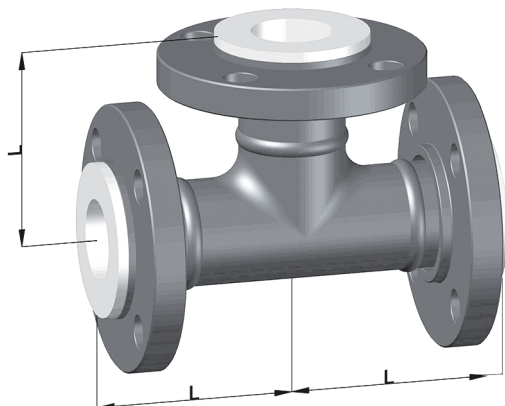


NB #150	L mm	Wt kg
1/2 "	65	1.6
3/4 "	75	2.2
1 "	89	3.5
1.5 "	102	5.9
2 "	114	9.2
3 "	140	17.9
4 "	165	26.1
6 "	203	41.7
8 "	229	68.8
10 "	279	96.8
12 "	305	132

BLOWN EQUAL TEE

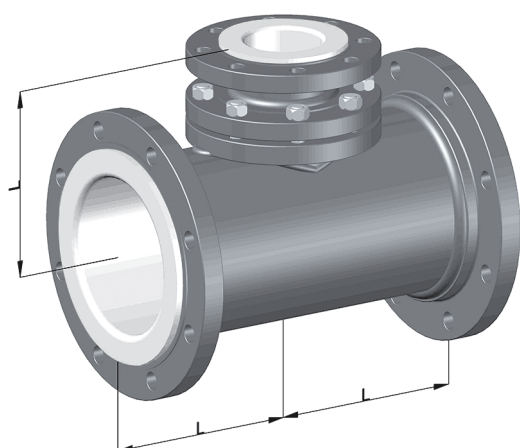

NB1 #150	NB2 #150	L mm	Wt kg
3/4 "	1/2 "	75	2.0
1 "	1/2 "	89	2.9
1 "	3/4 "	89	3.1
1 1/2 "	1/2 "	102	4.6
1 1/2 "	3/4 "	102	4.8
1 1/2 "	1 "	102	5.2
2 "	1/2 "	114	6.8
2 "	3/4 "	114	7.0
2 "	1 "	114	7.4
2 "	1 1/2 "	114	8.2
3 "	1 "	140	13.5
3 "	1 1/2 "	140	14.3
3 "	2 "	140	15.4
4 "	1 "	165	19.3
4 "	1 1/2 "	165	20.2
4 "	2 "	165	21.2
4 "	3 "	165	23.9
6 "	1 "	203	30.8
6 "	1 1/2 "	203	31.7
6 "	2 "	203	32.8
6 "	3 "	203	35.6
6 "	4 "	203	37.9
8 "	1 "	229	50.7
8 "	1 1/2 "	229	51.6
8 "	2 "	229	52.7
8 "	3 "	229	55.5
8 "	4 "	229	57.8
8 "	6 "	229	61.7
10 "	4 "	279	78.8
10 "	6 "	279	83.0
10 "	8 "	279	90.6
12 "	4 "	305	104
12 "	6 "	305	108
12 "	8 "	305	115
12 "	10 "	305	122

REDUCING TEE

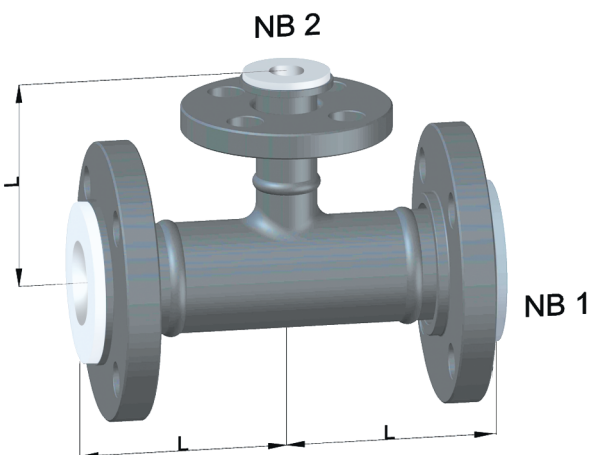

Picture for illustration only, type of steel fabrication varies

All the information given is intended as guideline for product selection and application and does not constitute a guarantee. Careful attention has been taken in the preparation of this document however Consym Sdn Bhd is not responsible for the use of the information. Changes may be made without notice to users.