



LINED INSTR TEE & BLIND FLANGE

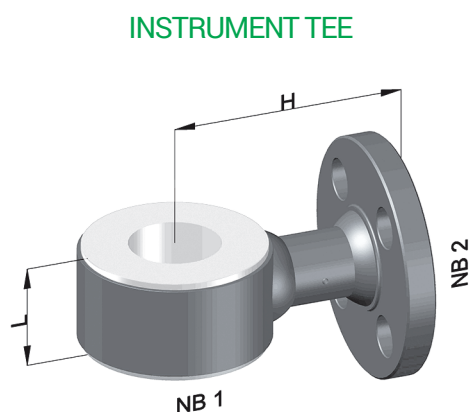

BLIND FLANGE



Picture for illustration only, type of steel fabrication varies

NB #150	D mm	H mm	Wt kg
1/2 "	89	16	0.3
3/4 "	98	18	0.5
1 "	108	19	0.9
1 1/2 "	127	20	1.3
2 "	152	24	2.4
3 "	190	29	4.9
4 "	229	29	6.9
6 "	279	30	11
8 "	343	34	19
10 "	406	36	28
12 "	482	38	45

NB1 #150	NB2 #150	L mm	H mm	Wt kg
1 "	1/2 "	50	89	1.9
1 "	3/4 "	50	89	1.9
1 "	1 "	50	89	2.0
1 1/2 "	1/2 "	50	102	2.7
1 1/2 "	3/4 "	50	102	2.8
1 1/2 "	1 "	50	102	3.0
1 1/2 "	1 1/2 "	75	102	4.6
2 "	1/2 "	50	114	4.7
2 "	3/4 "	50	114	4.8
2 "	1 "	50	114	5.0
2 "	1 1/2 "	75	114	8.4
2 "	2 "	90	114	9.9
3 "	1/2 "	50	140	5.7
3 "	3/4 "	50	140	5.8
3 "	1 "	50	140	6.0
3 "	1 1/2 "	75	140	11
3 "	2 "	90	140	12
4 "	1/2 "	50	165	6.7
4 "	3/4 "	50	165	6.8
4 "	1 "	50	165	7.0
4 "	1 1/2 "	75	165	12
4 "	2 "	90	165	13
6 "	1/2 "	50	203	8.9
6 "	3/4 "	50	203	9.0
6 "	1 "	50	203	10
6 "	1 1/2 "	75	203	15
6 "	2 "	90	203	16
8 "	1/2 "	50	229	10
8 "	3/4 "	50	229	10
8 "	1 "	50	229	10
8 "	1 1/2 "	75	229	16
8 "	2 "	90	229	17
10 "	1 "	50	279	24
10 "	1 1/2 "	75	279	26
10 "	2 "	90	279	27
12 "	1 "	50	305	29
12 "	1 1/2 "	75	305	30
12 "	2 "	90	305	30