


PLASTIC LINED CHEMICAL PROCESS PUMPS

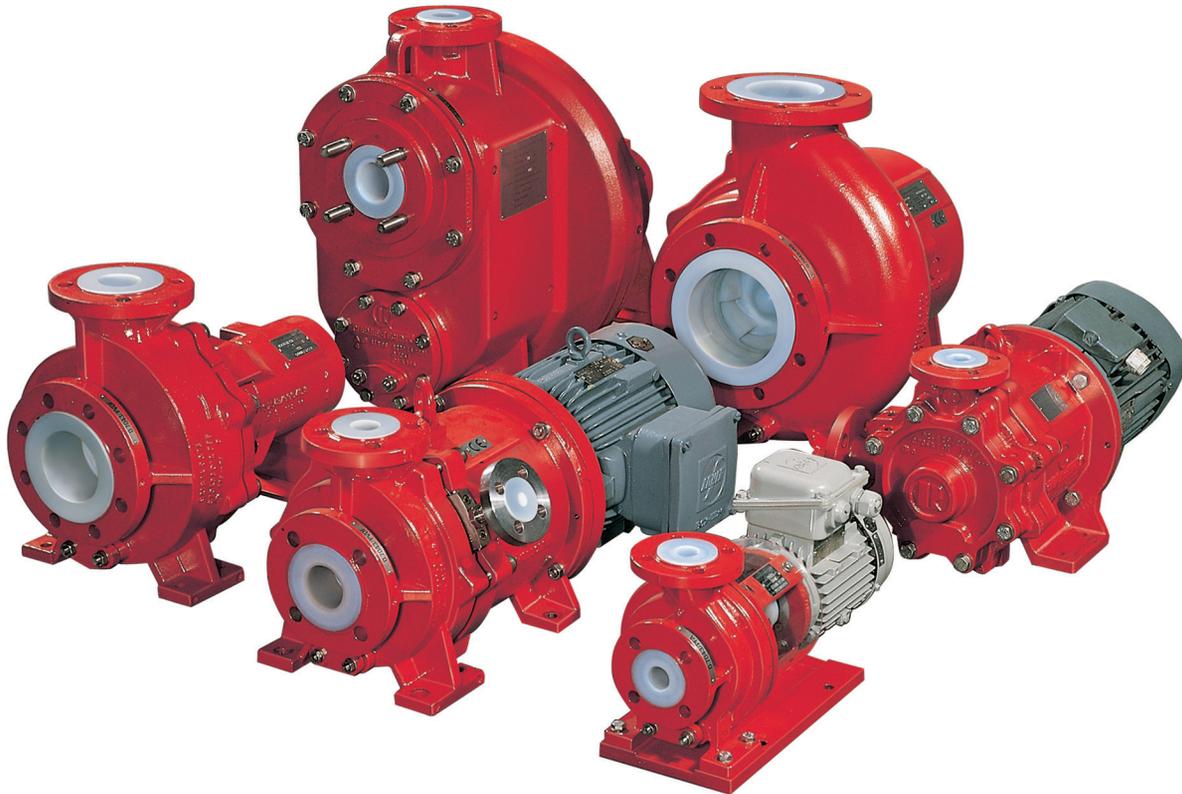

- ➔ Magnetic drive and mechanically sealed
- ➔ ISO/SIN and ASME/ANSI
- ➔ Lining PFA/PTFE fluorochemicals, PE-UHMW
- ➔ Optical vortex, peripheral, Self-priming
- ➔ Flows from 0,1-600 m³/h (0,4-2.400 USgpm)
- ➔ Heads up to 145 m (480 ft) LC
- ➔ Temperatures up to 200 °C (400 °F)

Safety down to the last detail

Chemical process pumps, shut-off, control and safety valves for corrosive, hazardous, contaminated, pure and high-purity fluids.