


Fluoroplastic Lined Manual and Other Valves

ISO 2858/DIN EN 22858 and ASME/ANSI B 73.3



Ball Valve:
KN/KNA & BVA

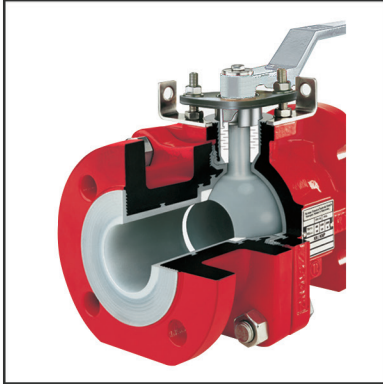

Diaphragm valve:
MV/MVM



Butterfly ball valve:
NKS/NKL/
NKS-C/NKL-C



Ball check valve :
CV/BC/SR/GR/RV/PRS



T-Strainer:
GS



Sight glass:
PSG/TSG/SGS/SR



Sampling ball valve:
PA-F/PA-S

- ➔ Temp.: -60 to 150/200°C
- ➔ ISO/DIN PN 16: vacuum to 16 bar
- ➔ ASME/ANSI Cl .150, vacuum to 19 bar