


Fluoroplastic Lined Control + On/Off Safety Valves

ISO/DIN PN 16/25 and ASME/ANSI Cl. 150 - DN 15 to 1000 (1/2 to 40")



globe control

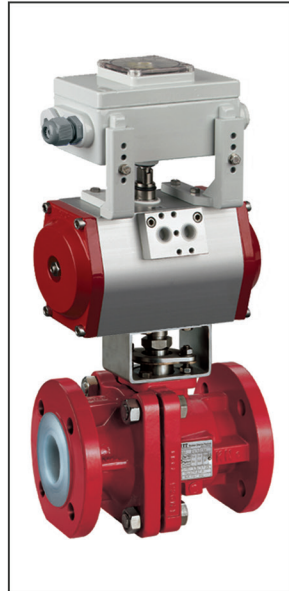

ball control



butterfly control




diaphragm control



bottom drain



safety relief

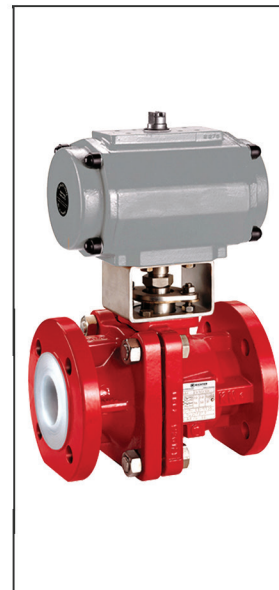

actuated ball



safety valve

- ➔ Temp.: -60 to 150/200°C
- ➔ ISO/DIN PN 16: vacuum to 16 bar
- ➔ ASME/ANSI Cl. 150, vacuum to 19 bar